

### M-Audio Support Documentation:

## An Introduction to setting up your Delta To Work With Steinberg's Cubasis

1. Launch Cubasis. Cubasis may have you run an ASIO test to diagnose the capabilities of the Delta card. Go ahead and run it if it is a first-time installation.




2. Next, Go to the **Audio** menu and select **System**. Here, you can select which ASIO driver to use. Use the **M Audio Delta ASIO driver** if you wish to take advantage of Steinberg's Audio protocol, or "ASIO Multimedia driver" if you wish to use direct monitoring using Standard Microsoft Multimedia Protocol



3. Next, launch the M-Audio Delta Control Panel. Go to the Patchbay Router and select **WavOut** for all H/W Outs if you are using ASIO.

Select **Monitor Mixer** if you are using ASIO Multimedia.

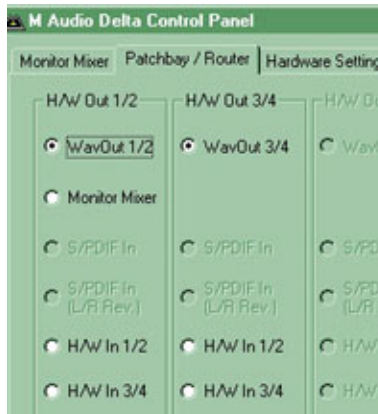

4. Select an audio track to record by highlighting it.

Enable recording by clicking on the **ENABLE** button.



5. Press the RECORD button on the Cubasis transport bar. Cubasis will then prompt you as to where you would like to save the audio data on your HD.



6. On the TRANSPORT BAR, press PLAY such that REC and PLAY both light up RED and GREEN, respectively. You are now recording.



**M-AUDIO**



**arKaos**

copyright 1988-2003 midiman inc. all rights reserved.