


TELECASTER (TAPPED)

SWITCH VOLUME TONE

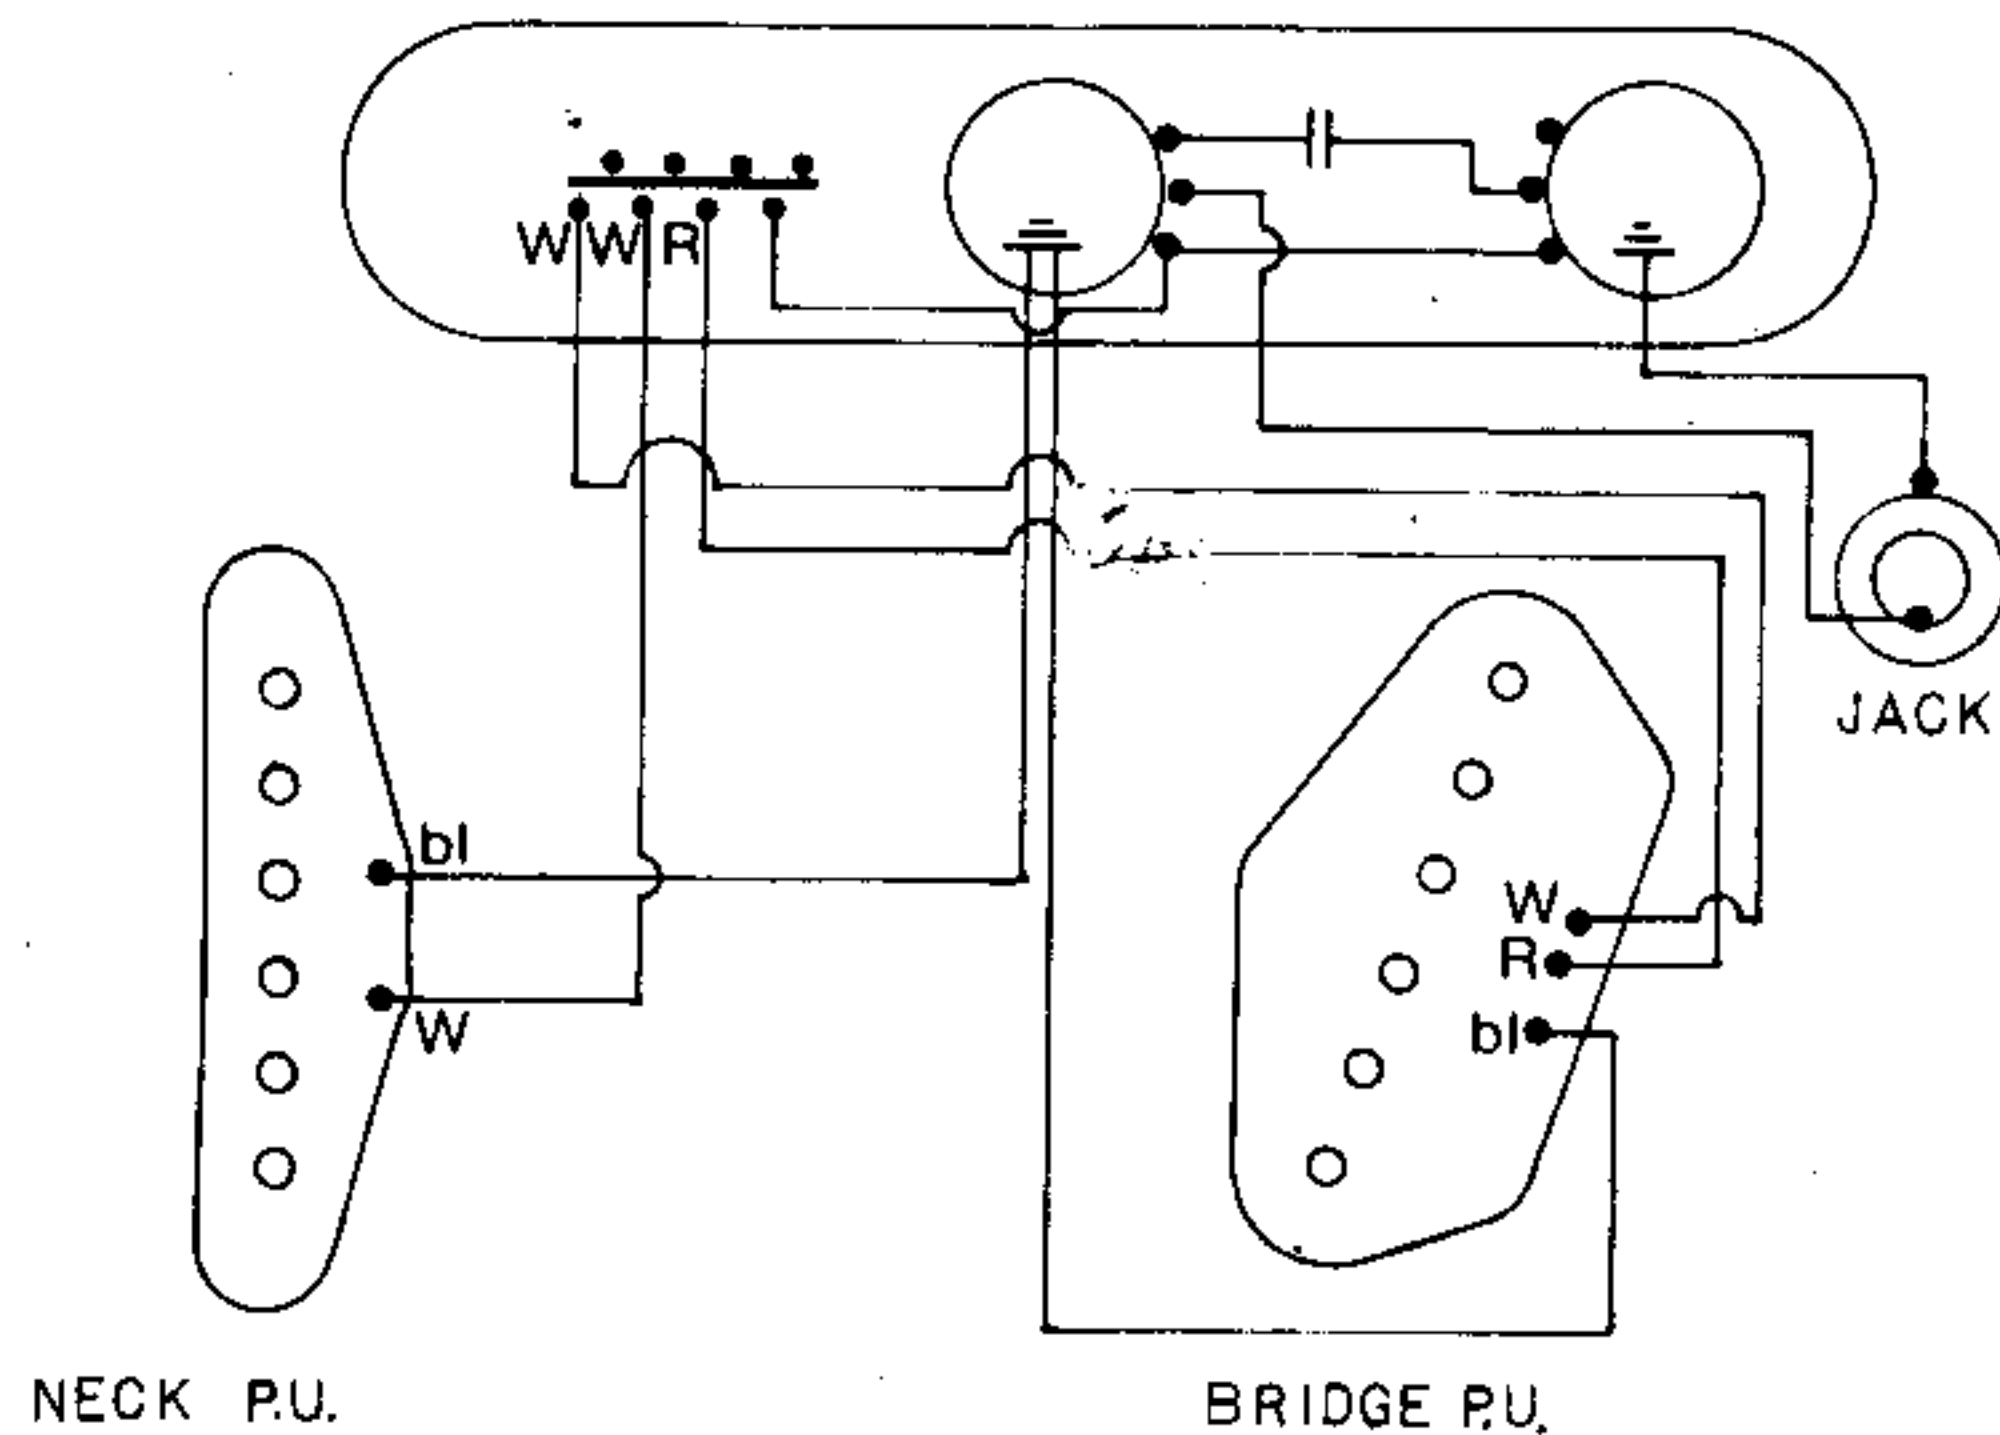

NECK P.U.

BRIDGE P.U.

bl — Black Wire (Ground)
R — Red Wire (Tap)
W — White Wire (Hot)
+ — Capacitor .05 mfd.

STL-2+ Hot Tele Lead Tapped

A versatile full sounding pickup with an output most desirable to the lead player and studio musician. Untapped the highs are not as pronounced as the STL-1 but in the tapped mode the windings are reduced to achieve a thinner brighter sound. To avoid drilling holes for an additional switch, replace the three position toggle switch for a five position one and rewire as indicated in the schematic.

Mounting Screws and Ground Wire are Included

SEYMOUR DUNCAN PICKUPS

716 Bond Ave., Box 4746, Santa Barbara, CA 93103 USA
(805) 963-0676 CABLE: (SEYDUNCAN)

STL-2 Hot Tele Lead Pickups
STL-3 Quarter-Pound™ Tele Lead Pickups

**INSTALLATION INSTRUCTIONS
ON REVERSE SIDE**

When installing either STL-2 or STL-3 pickups it is necessary to ground the bridge plate to the control plate. Using the enclosed lead wire, insert the stripped end between the bridge plate and the body. Screw the bridge plate down securely. Now insert the other end of the wire down into the lead pickup cavity and thru the channel to the control cavity. Solder this end of the wire to ground, that is, somewhere on the underside of the control plate.

NOTE: This reduces string buzz, but increases the possibility of shock should you touch your strings and a mike of the opposite polarity. BE CAREFUL.

Box 4746 Santa Barbara, CA 93103