

Wiring Schematics for

STK-S1 Classic Stack® Pickup

STK-S2 Hot Stack® Pickup

For Stratocaster Guitar

**Seymour
Duncan®**


5427 Hollister Ave.

Santa Barbara, CA 93111-2345


(805) 964-9610, FAX (805) 964-9749

3. Series/Parallel — use a DPDT on/on switch

4. Series/Split/Parallel — use a DPDT on on/on switch

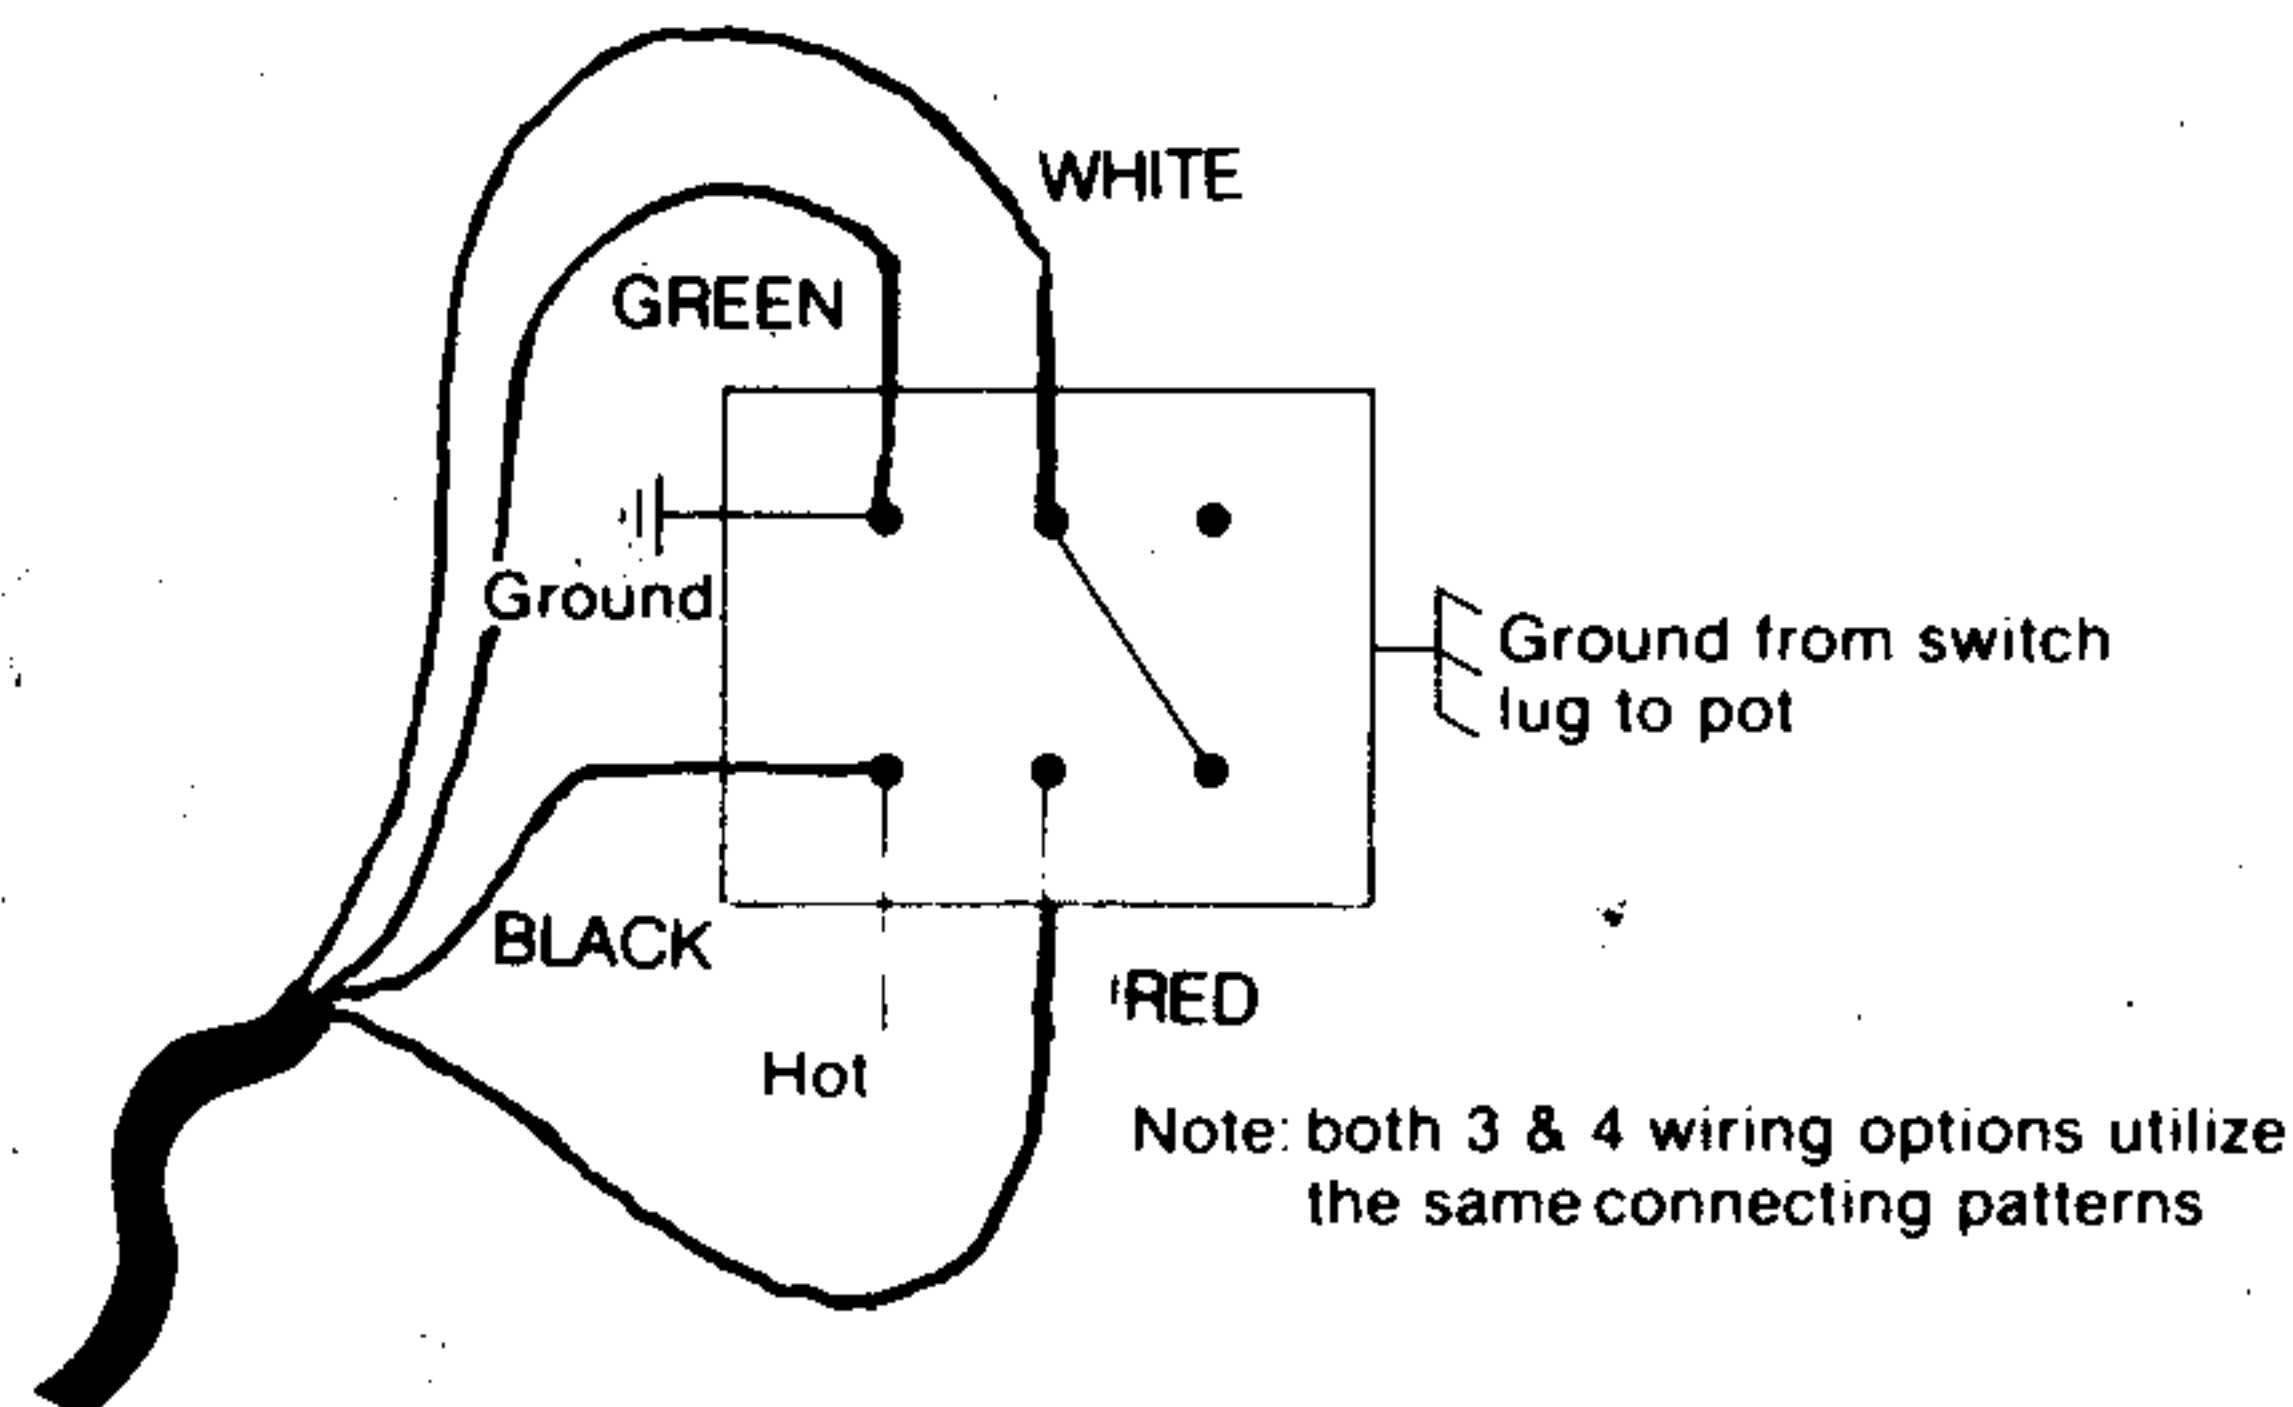


1. Standard noise cancelling operation

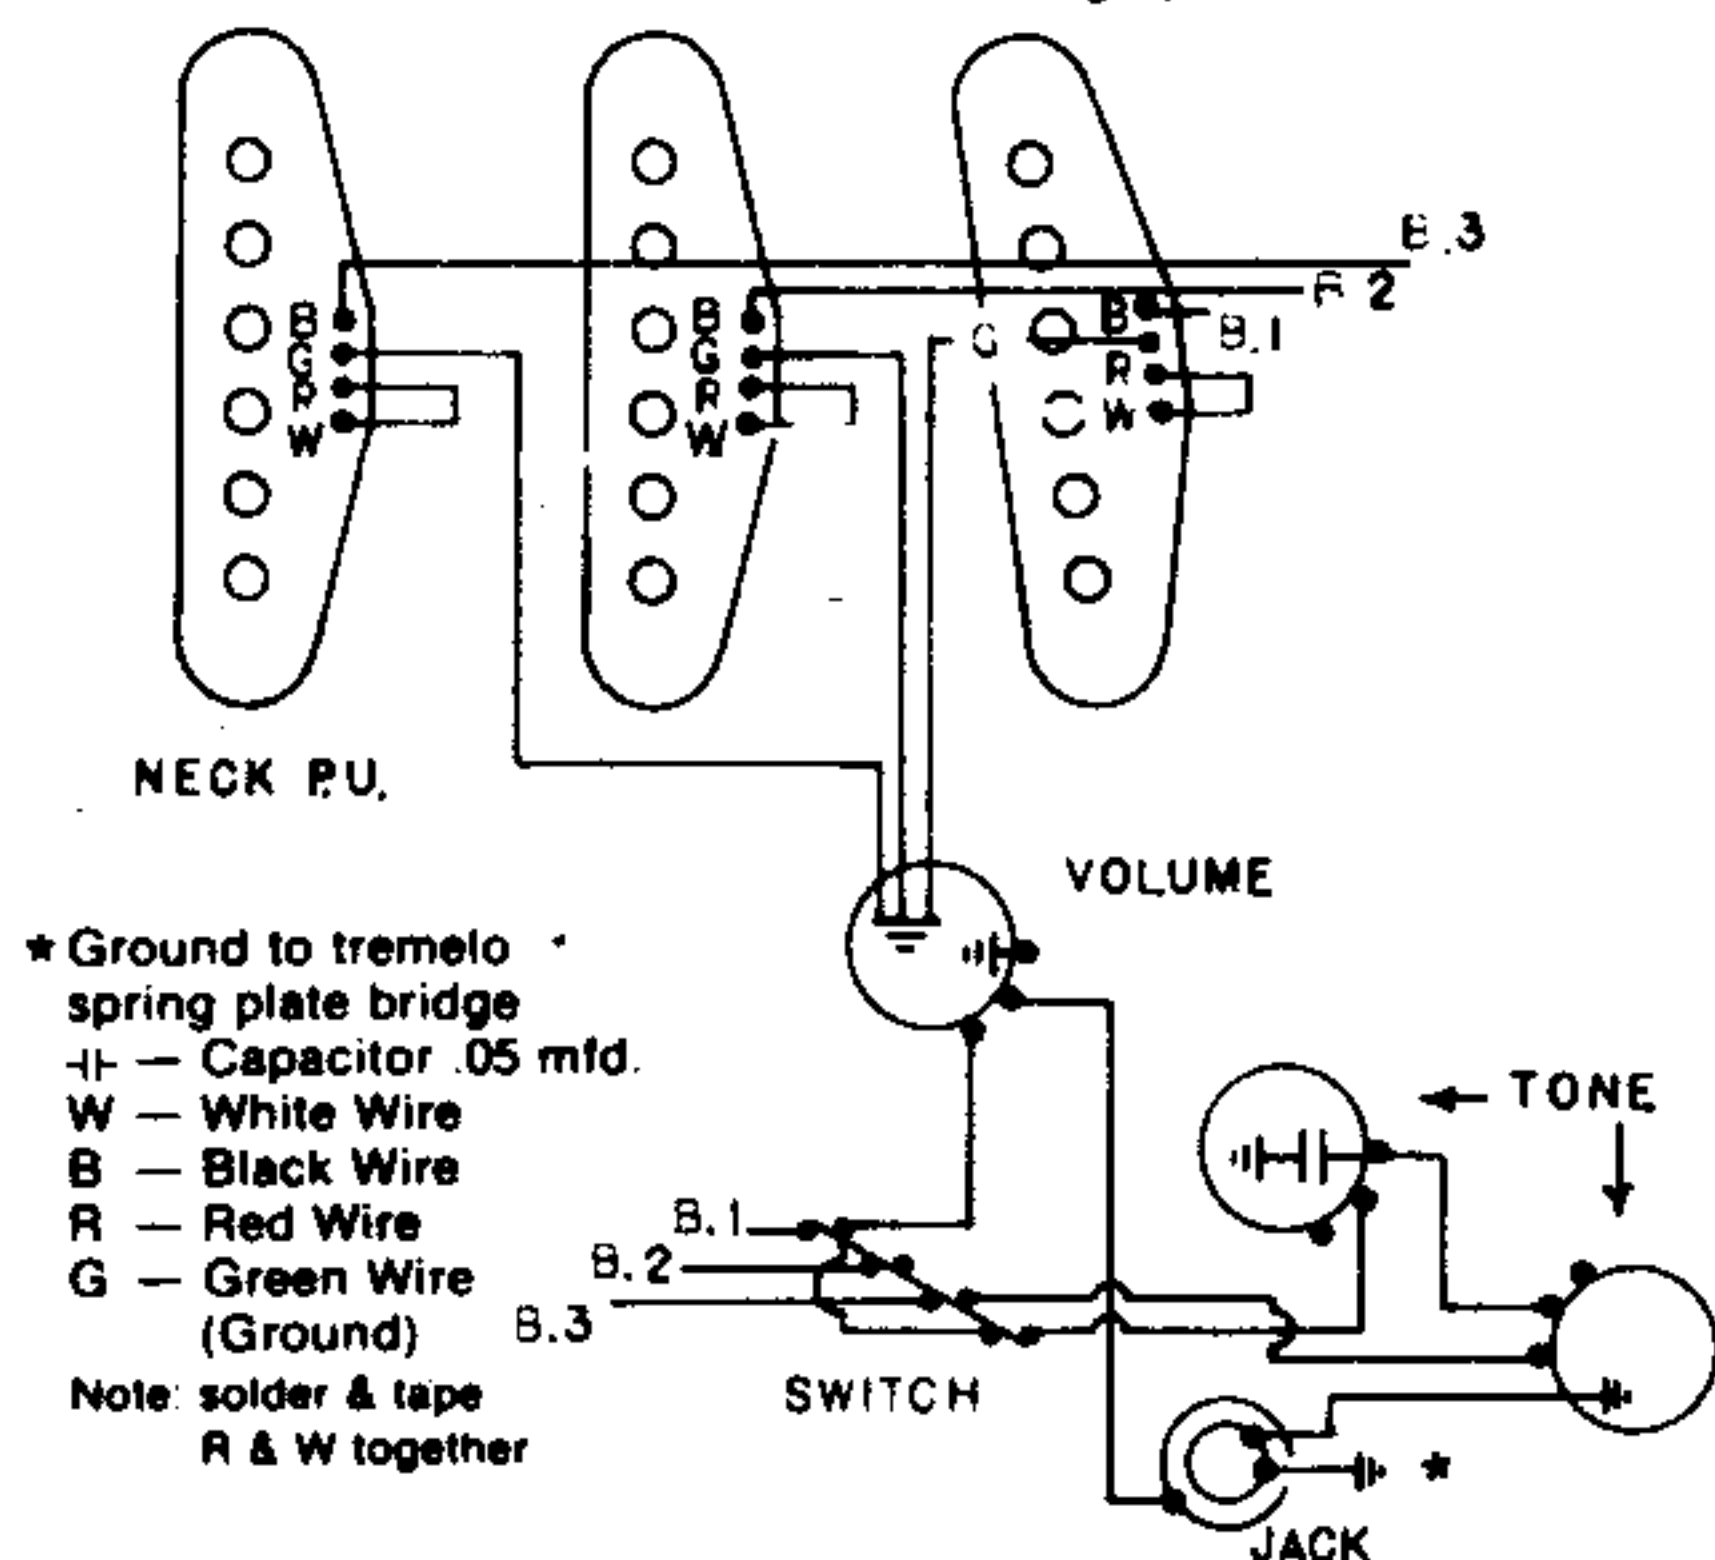


POWER BOOST WIRING

Note: Hum-cancelling will be lost in high output mode. If no switch is desired, solder and tape the red and white wires together, the green is then grounded and the black becomes hot output.

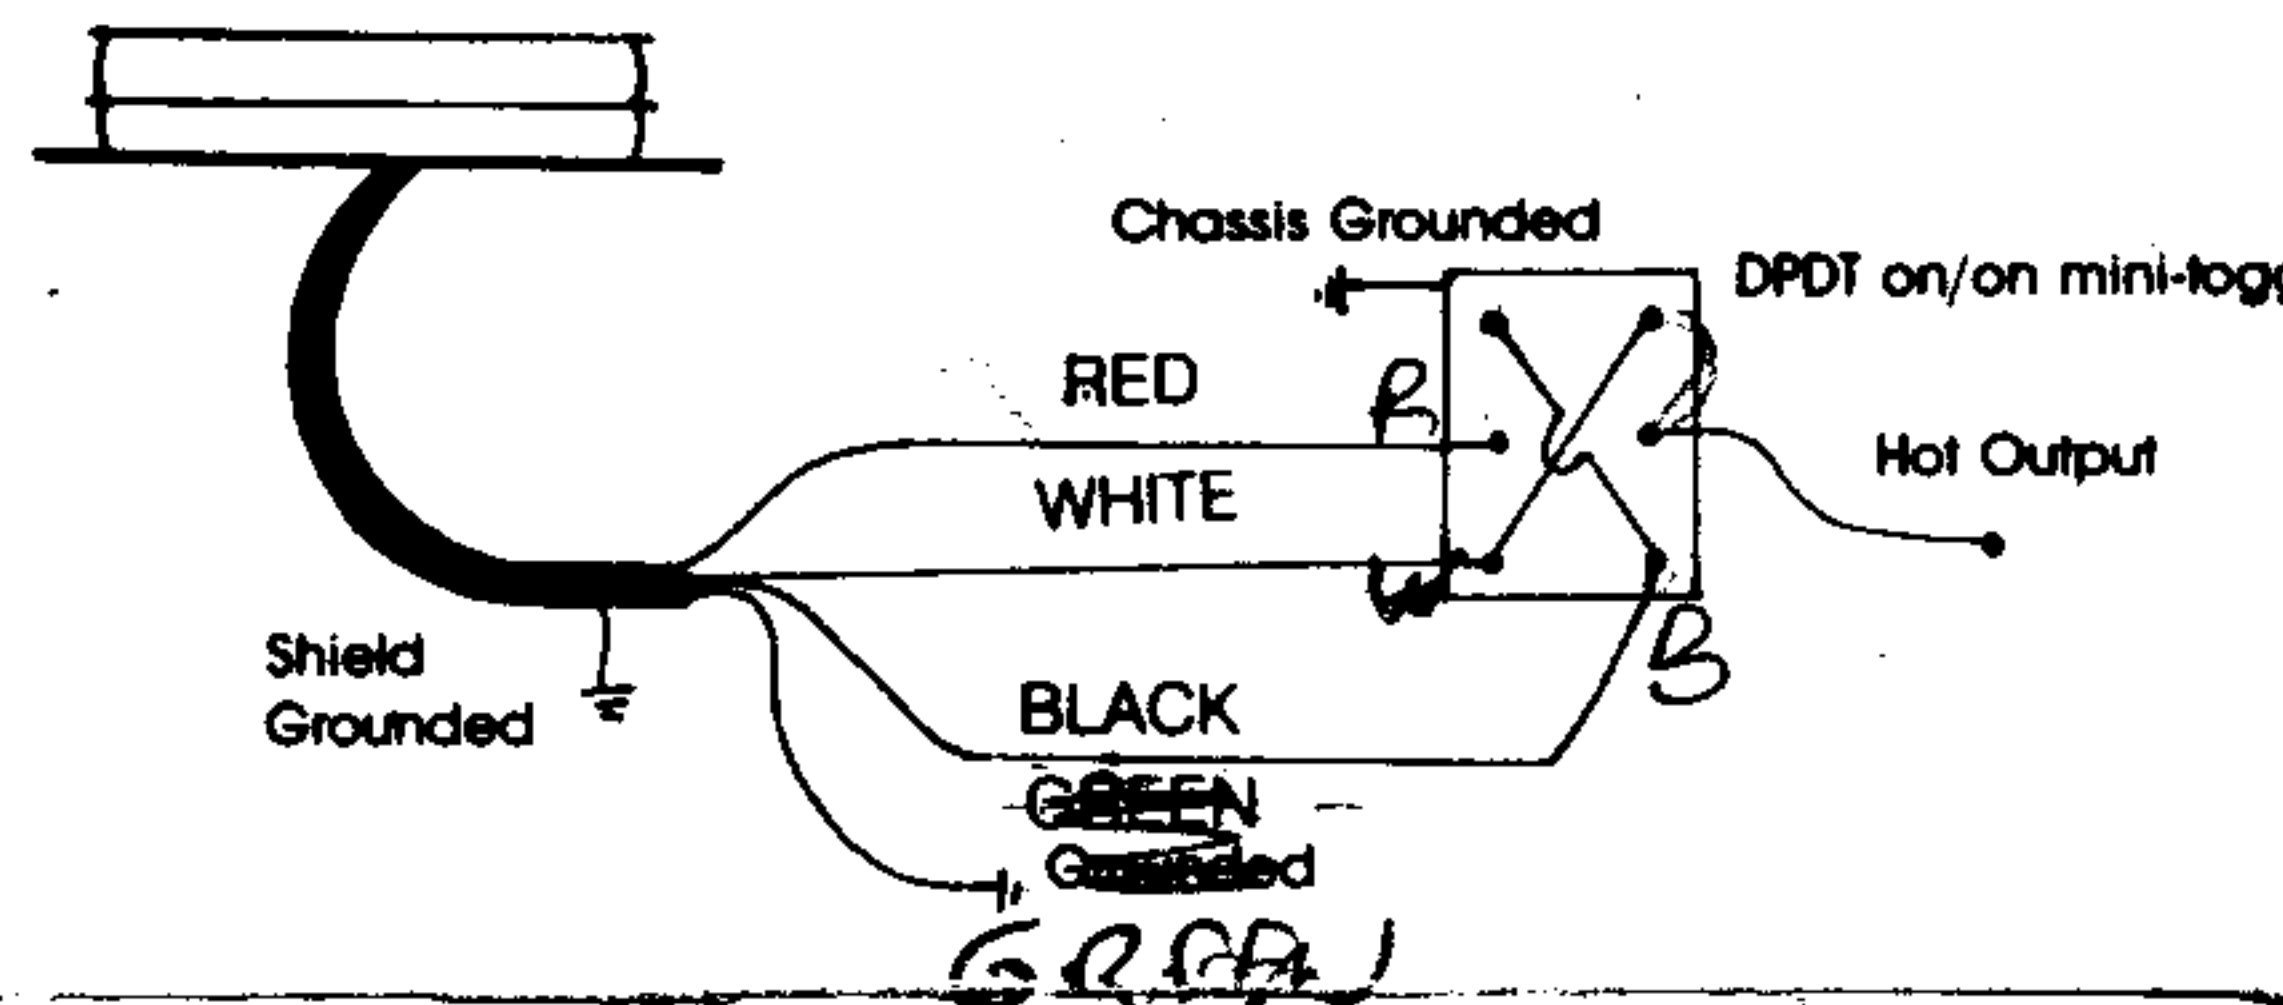

2. Phasing — when used with another pickup

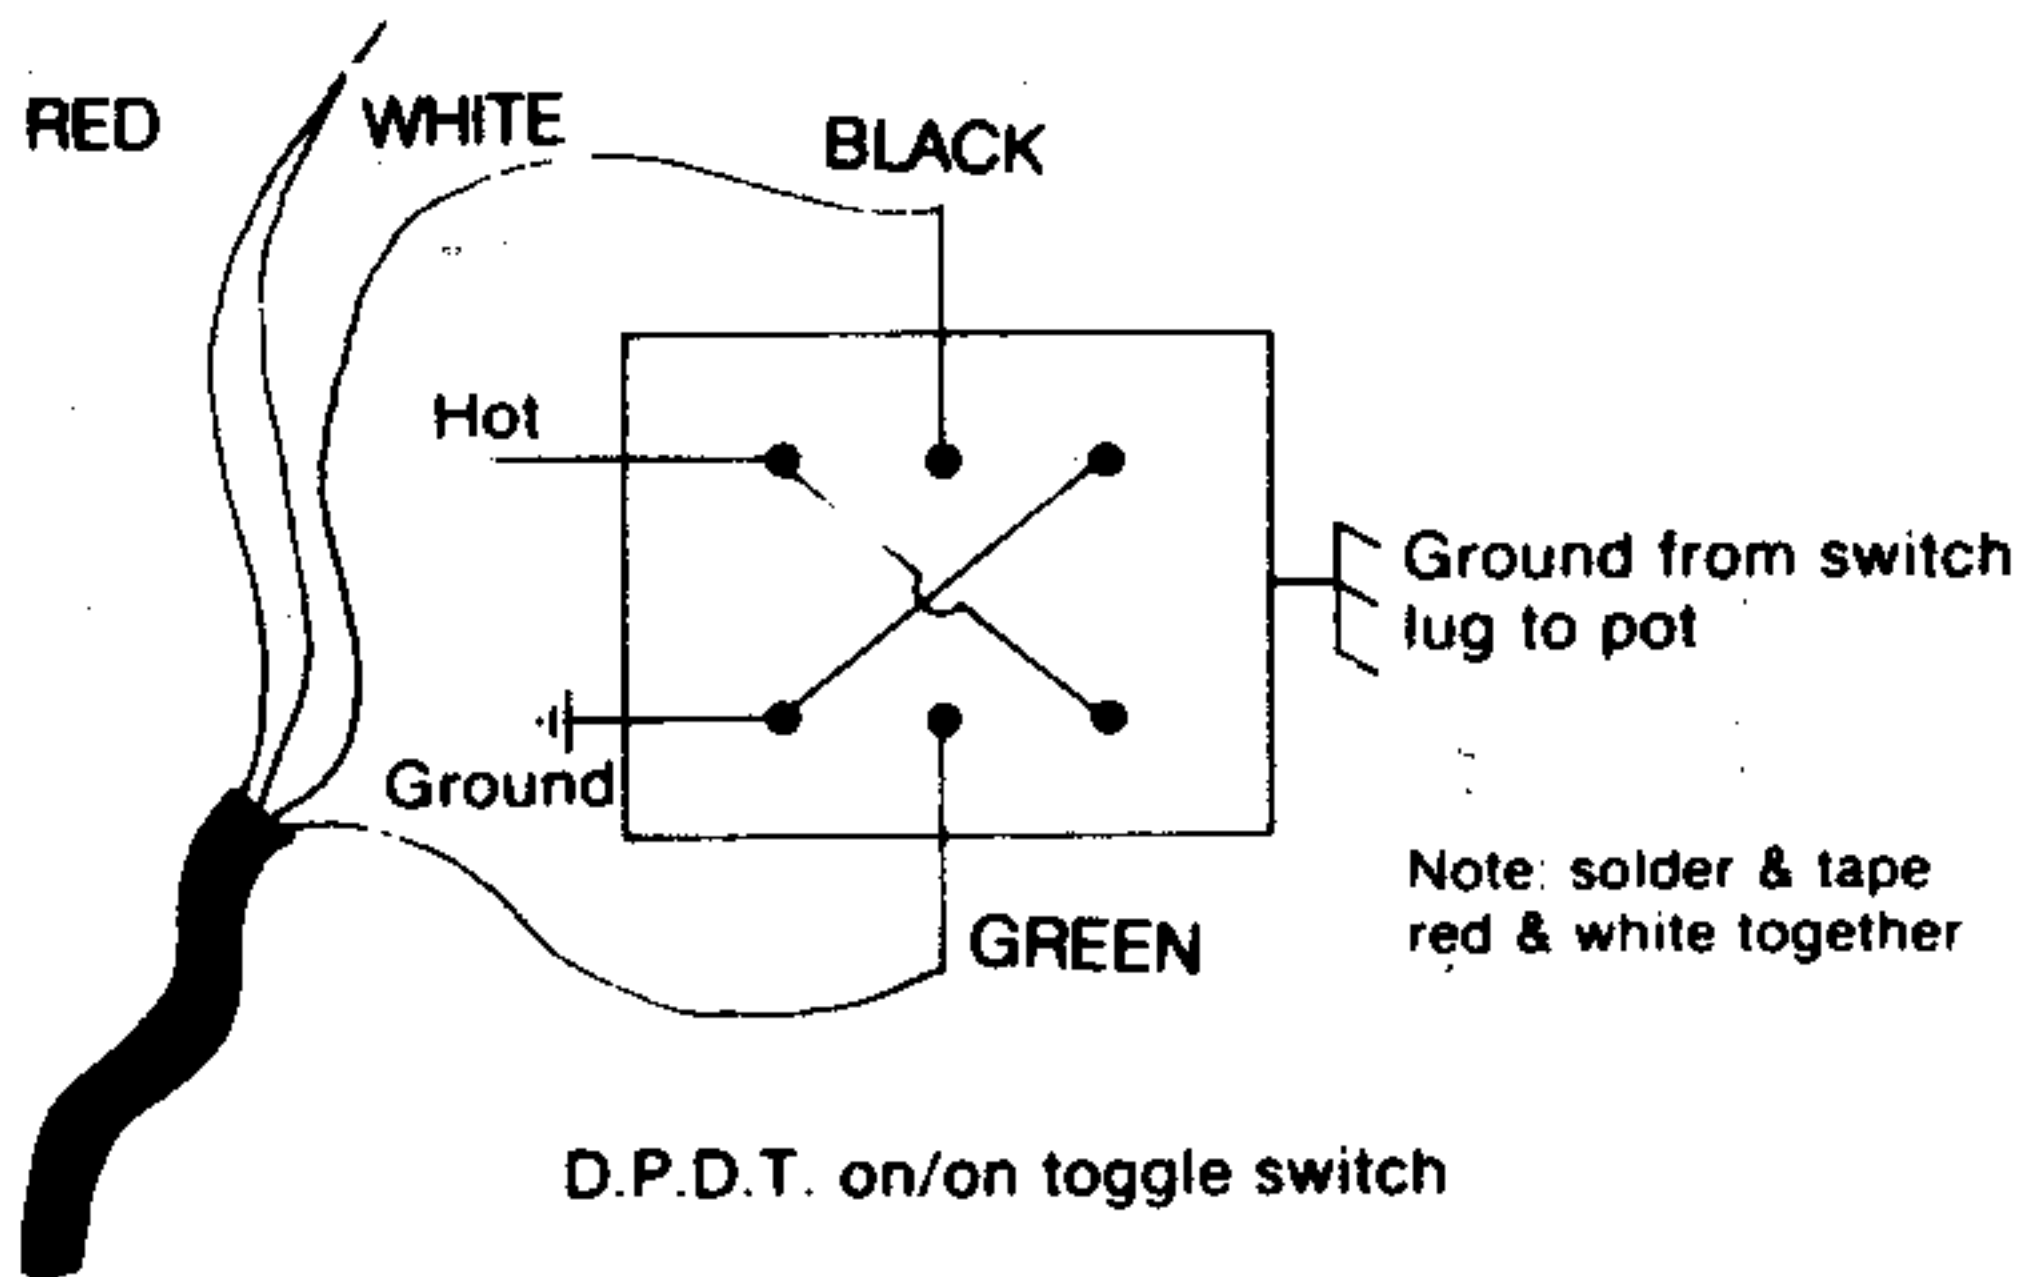

Note: If you have an output loss when using 2 pickups together, then the pickups are "out of phase" with each other. Reverse the "black" and "green" wires on 1 of the pickups.